

# NICOR<sup>®</sup> | LED

4" Multi-Adjustable Recessed **LED** Downlight  
**DQR4MA**




**Adjusts to Fit Your Life**

# DQR4MA

## 4" Multi-Adjustable Recessed LED Downlight

The DQR4MA multi-adjustable series is a modern, square architectural solution for both new construction and retrofit lighting of residential, commercial, and retail spaces. This multi-adjustable downlight can be fully rotated (359°) and pivoted (±30°) making it a very flexible option for wall wash and sloped ceilings. For precise aiming, the DQR4MA is easily adjusted from below the ceiling. The use of high efficiency LED technology to balance color for natural white light, exceptional color rendering of greater than 90 CRI, and high efficacy make this luminaire an ideal choice for homes, showrooms, conference rooms, corridors and other commercial spaces.

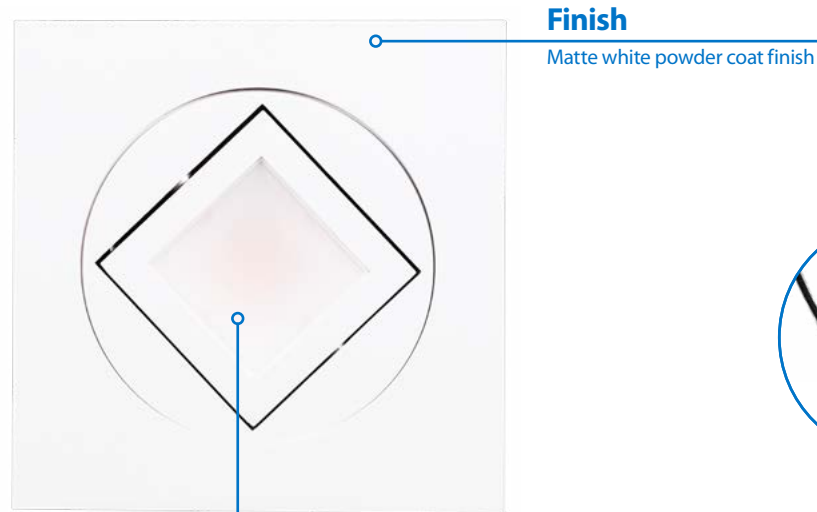

### Finish

Matte white powder coat finish

### Polystyrene Diffuser

Polystyrene diffuser creates uniform light distribution that reduces glare without sacrificing lumen output.



### Edison Base Socket String


Ships with Edison base socket string for retrofit installation

### Trim

Die cast aluminum, square trim


### Integrated Driver

Low profile integrated drivers allows the use of shallow housings.

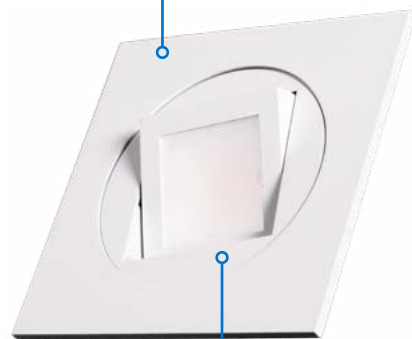

### Fixture Adjustments

Manual tilt of ±30° and rotation up to 359°

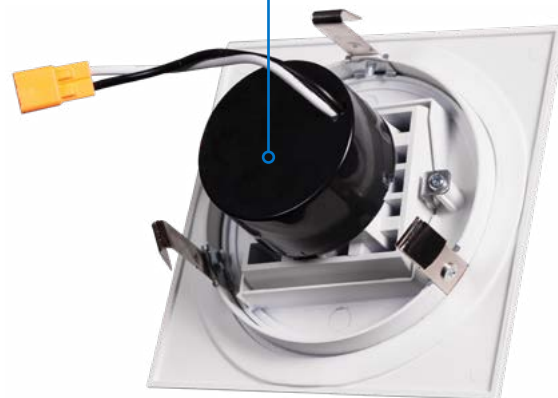

# DQR4MA

## Ordering Information

### Construction

Die cast aluminum housing  
Low profile integrated driver allows for use in shallow housings

### Optical System

Polystyrene diffuser creates uniform light distribution that reduces glare without sacrificing lumen output

### Electrical

Utilizes high performing LEDs with greater than 90 CRI and an R9 greater than 50  
Input voltage of 120VAC  
Dimmable to 5% with recommended TRIAC dimmers  
Operating temperature rating of 0°F to 102°F (-18°C to 40°C)  
TM-21 Reported L70(6k) >36,000 hours  
LM-79 testing performed in accordance with IESNA standards  
Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

### Mounting and Installation


Compatible with most 4" recessed housings  
Quick and easy installation with a screw-in Edison base (GU24 socket string available) and friction clip mounting system

### Finish

Matte white powder coat finish

### Warranty

5-year limited system warranty standard  
Warranty does not cover product failure due to an overvoltage event (power surge).  
For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

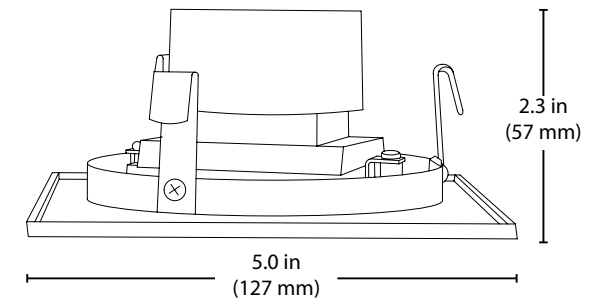

Performance Data			
Model Number	Lumens	Watts	Lumens/Watt
DQR4MA11202K	669	8.9	75.2
DQR4MA11203K	688	8.9	77.3
DQR4MA11204K	706	8.9	79.3
DQR4MA11205K	721	8.9	81.0



Ordering Information				
Series	Version	Voltage	CCT's	Finish
DQR4MA	1	120 (120V)	2K (2700 K)	WH (White)
			3K (3000 K)	
			4K (4000 K)	
			5K (5000 K)	

Specifications and dimensions subject to change without notice. Please go to nicorlighting.com for the most up-to-date information.

Example: DQR4MA11203KWH

### Warehouse Locations

Albuquerque, NM  
Atlanta, GA  
Detroit, MI  
Houston, TX  
Indianapolis, IN

Lombard, IL  
Miami, FL  
Syracuse, NY  
Van Nuys, CA

**T 800.821.6283**

F 800.892.8393

[www.nicorlighting.com](http://www.nicorlighting.com)

2200 Midtown Pl. NE  
Albuquerque, NM 87107 USA



LIT-DQR4MA-10PK  
20190318

©2019 NICOR® • ALL RIGHTS RESERVED



**NICOR**® | **LED**