

ET-LED-213


LED GIMBAL TRACK FIXTURE

LUMEN PACKAGE: UP TO 1100L

WATTAGE: 17W



DIMENSIONS:

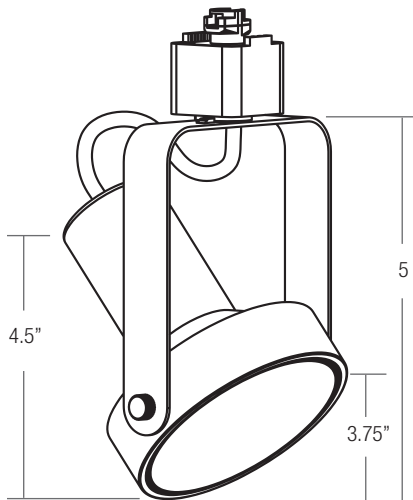

OPTICS



(VWFL) Very Wide Flood
50° - 60°

Catalog Number:

Project Name:

Note:

Type:

LED MODULE PERFORMANCE

Available in 3000K.

High color rendering of 90+ CRI and guaranteed color consistency within a 2 step MacAdams Ellipse.

Guaranteed lumen maintenance of 70% at 50,000 hrs and tested to LM-79 and LM-80 standards by an independent laboratory.

Track heads available in a variety of delivered lumen options based on series: 1100L.

DIMMING INFORMATION

Multiple dimming options available, with smooth dimming down to 10% of full light

Our LED drivers are rated for 60Hz at 120V input and produce less than 20% THD, and a power factor between 90% and 100%

WARRANTY

Five years limited warranty and a minimum 50,000 hours performance at L70.

FINISH

Track is available in black and white.

HOUSING

All tracks are design using a proprietary COOLED Advanced Thermodynamic Design. Heat management systems are engineered for extremely long life and service period.

Electronic constant current LED driver compatible with TRIAC (forward-phase or leading-edge) and input 120V. Protections : output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery.

Tracks are shipped standard to be compatible with 1 Circuit and 2 Circuit type H track. It is also available for 2 Circuit 2 Neutral 120V Track.

Track heads are adjustable up to 360° horizontally and 180° vertically

Track heads use a friction-based movement system that allows you to adjust and re-adjust track head positioning to deliver light where your need it most. Once the angles have been set each track light will stay in place until re-adjusted for the next display.

NOTE: Ceiling mount Only.



Example: ET-LED-213-1100L-DIMTR-120-WFL-30K-90-AWH

| SERIES | LUMENS/DIMMING | OPTICS | STANDARD SERIES CCT/CRI | COLOR |
|------------|------------------------------------------|------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------|
| ET-LED-213 | <input type="checkbox"/> 1100L-DIMTR-120 | <input type="checkbox"/> WFL = 38° | <input type="checkbox"/> 30K-90 | <input type="checkbox"/> AWH(Architectural White) <input type="checkbox"/> ABK(Architectural Black) |

SPECIFICATIONS:

ET-LED-213

LUMEN/DIMMING

OPTICS

STANDARD
CCT/CRI

COLOR

Example: ET-LED-213-1100L-DIMTR-120-WFL-30K-90-AWH